


Product Data

Material: White PTFE yarn with yellow Aramid corners
 Construction: Interwoven™ braid
 Temperature: 500°F (260°C)
 pH Range: 1 – 12
 Pressure: 600 psi in pumps;
 2800 in plunger pumps
 Shaft Speed: 1,500 fpm (8 m/s)

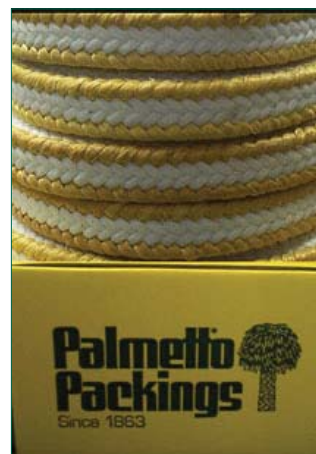

Service

Style 1364 combines white PTFE yarn with yellow Aramid corners. Combining these two yarns provides excellent chemical compatibility with durable corners to prevent packing extrusion. Used in slow and/or large mixer shafts.

How to Order

Specify: style number, size, quantity and packaging desired

Size	in	1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"
	mm	3,20	4,80	6,40	7,90	9,50	11,10	12,70	14,30	15,90	17,50	19,10	20,60	22,20	23,80	25,40

Distributed by

A Greene, Tweed Company
 Denton Industrial Park
 25 Engerman Ave., Denton, MD 21629
 Phone: +1.410.479.2244, Fax: +1.410.479.0836
 E-mail: info@palmettopackings.com
 Website: www.palmettopackings.com

Product data is based upon our experience and knowledge of typical applications and should be used to determine approximate service compatibility.

All trademarks are property of their respective owners.
 Printed in USA ©2014 Palmetto®
 08/14-GT DS-US-PI-185