


Product Data

Material: Carbon packing
Construction: Interwoven™ braided packing
Temperature: 650°F (340°C)
pH Range: 0 – 14
Pressure: 2,500 psi (172.5 bar) in valves,
 500 psi (35 bar) in pumps
Shaft Speed: 4,000 fpm (20 m/s)

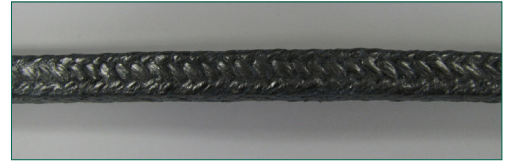

Service

Styles 1570, 1575 and 1578 are excellent carbon packings for high-speed, high temperature applications. They are stronger, lower cost alternatives to Palmetto styles 1580, 1585 and 1588. These styles service high-temperature applications that require wide pH range and durability.

Style 1570 has a wide pH range for chemical and caustic applications and is durable enough for abrasive media. Also available as style 1575 with a graphite coating or style 1578 with a PTFE coating. Ideal for difficult slurry media found in pulp & paper, mining, etc.

Carbon Packings

· 1570, 1575, 1578, 1580, 1585, 1588, PE5158 & 4062AF

How to Order

Specify: style number, size, quantity and packaging desired

Size	in	1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"
	mm	3,20	4,80	6,40	7,90	9,50	11,10	12,70	14,30	15,90	17,50	19,10	20,60	22,20	23,80	25,40

Distributed by

A Greene, Tweed Company
 Denton Industrial Park
 25 Engerman Ave., Denton, MD 21629
 Phone: +1.410.479.2244, Fax: +1.410.479.0836
 E-mail: info@palmettopackings.com
 Website: www.palmettopackings.com



Product data is based upon our experience and knowledge of typical applications and should be used to determine approximate service compatibility.

All trademarks are property of their respective owners.
 Printed in USA ©2011 Palmetto[®] Inc.
 01/11-GT DS-US-PI-126