


## Product Data

Material:	Zenar™ yarn loaded with graphite powder, with inert lubricant
Construction:	Interwoven™ braid
Abrasion Resistance:	Wear resistance of Aramid
pH Range:	1 – 13
Pressure Limit:	800 psi (pumps) 5000 psi (plunger pumps)
Shaft Speed:	2500 fpm
Temperature Limit:	-400°F to 550°F (-240°C to 280°C)

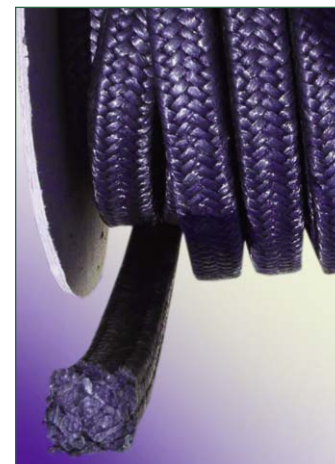

## Fiber Technology

When strength and wear resistance are critical, PE1000 provides extended service life with virtually no sleeve scoring. Zenar™, an exclusive fiber of Palmetto Inc., is a breakthrough in fiber technology. With the heat dissipation of graphite, strength of Aramid and suppleness of weaker composites, PE1000 helps slurry handlers improve the bottom line through energy savings, lower sleeve wear, and longer packing life.

## Features

- Wear resistance and strength matched only by Aramid
- Nonfraying (taping the ends when cutting is not necessary)
- Excellent die-formability
- Longest service life in slurry applications

## Typical Applications

Centrifugal pumps, agitators, mixers, valves, reciprocating high-pressure plunger pumps, compressors and high-pressure hydraulic cylinders among others. All dynamic equipment processing aggressive abrasive slurries and/or extremely high-pressure fluids.

## How to Order

Specify: style number, size, packaging and quantity desired

Size	in	1/8"	3/16"	1/4"	5/16"	3/8"	7/16"	1/2"	9/16"	5/8"	11/16"	3/4"	13/16"	7/8"	15/16"	1"
	mm	3,20	4,80	6,40	7,90	9,50	11,10	12,70	14,30	15,90	17,50	19,10	20,60	22,20	23,80	25,40
Length	ft/lb	63,66	45,00	25,00	16,50	10,50	8,12	6,16	4,70	3,85	3,40	2,88	2,30	2,15	1,95	1,60
	M/kg	42,65	30,15	16,75	12,54	7,04	5,44	4,13	3,15	2,58	2,28	1,88	1,54	1,44	1,31	1,07
Packaging	*Sizes 1/8" through 1/2" available in 1 lb. spools. All sizes available in 5 and 10 lb. boxes; 25 and 50 lb. reels.															

## Distributed by

A Greene, Tweed Company  
Denton Industrial Park  
25 Engerman Ave., Denton, MD 21629  
Phone: +1.410.479.2244, Fax: +1.410.479.0836  
E-mail: [info@palmettopackings.com](mailto:info@palmettopackings.com)  
Website: [www.palmettopackings.com](http://www.palmettopackings.com)

Product data is based upon our experience and knowledge of typical applications and should be used to determine approximate service compatibility.

All trademarks are property of their respective owners.  
Printed in USA ©2014 Palmetto®  
08/14-GT DS-US-PI-201